
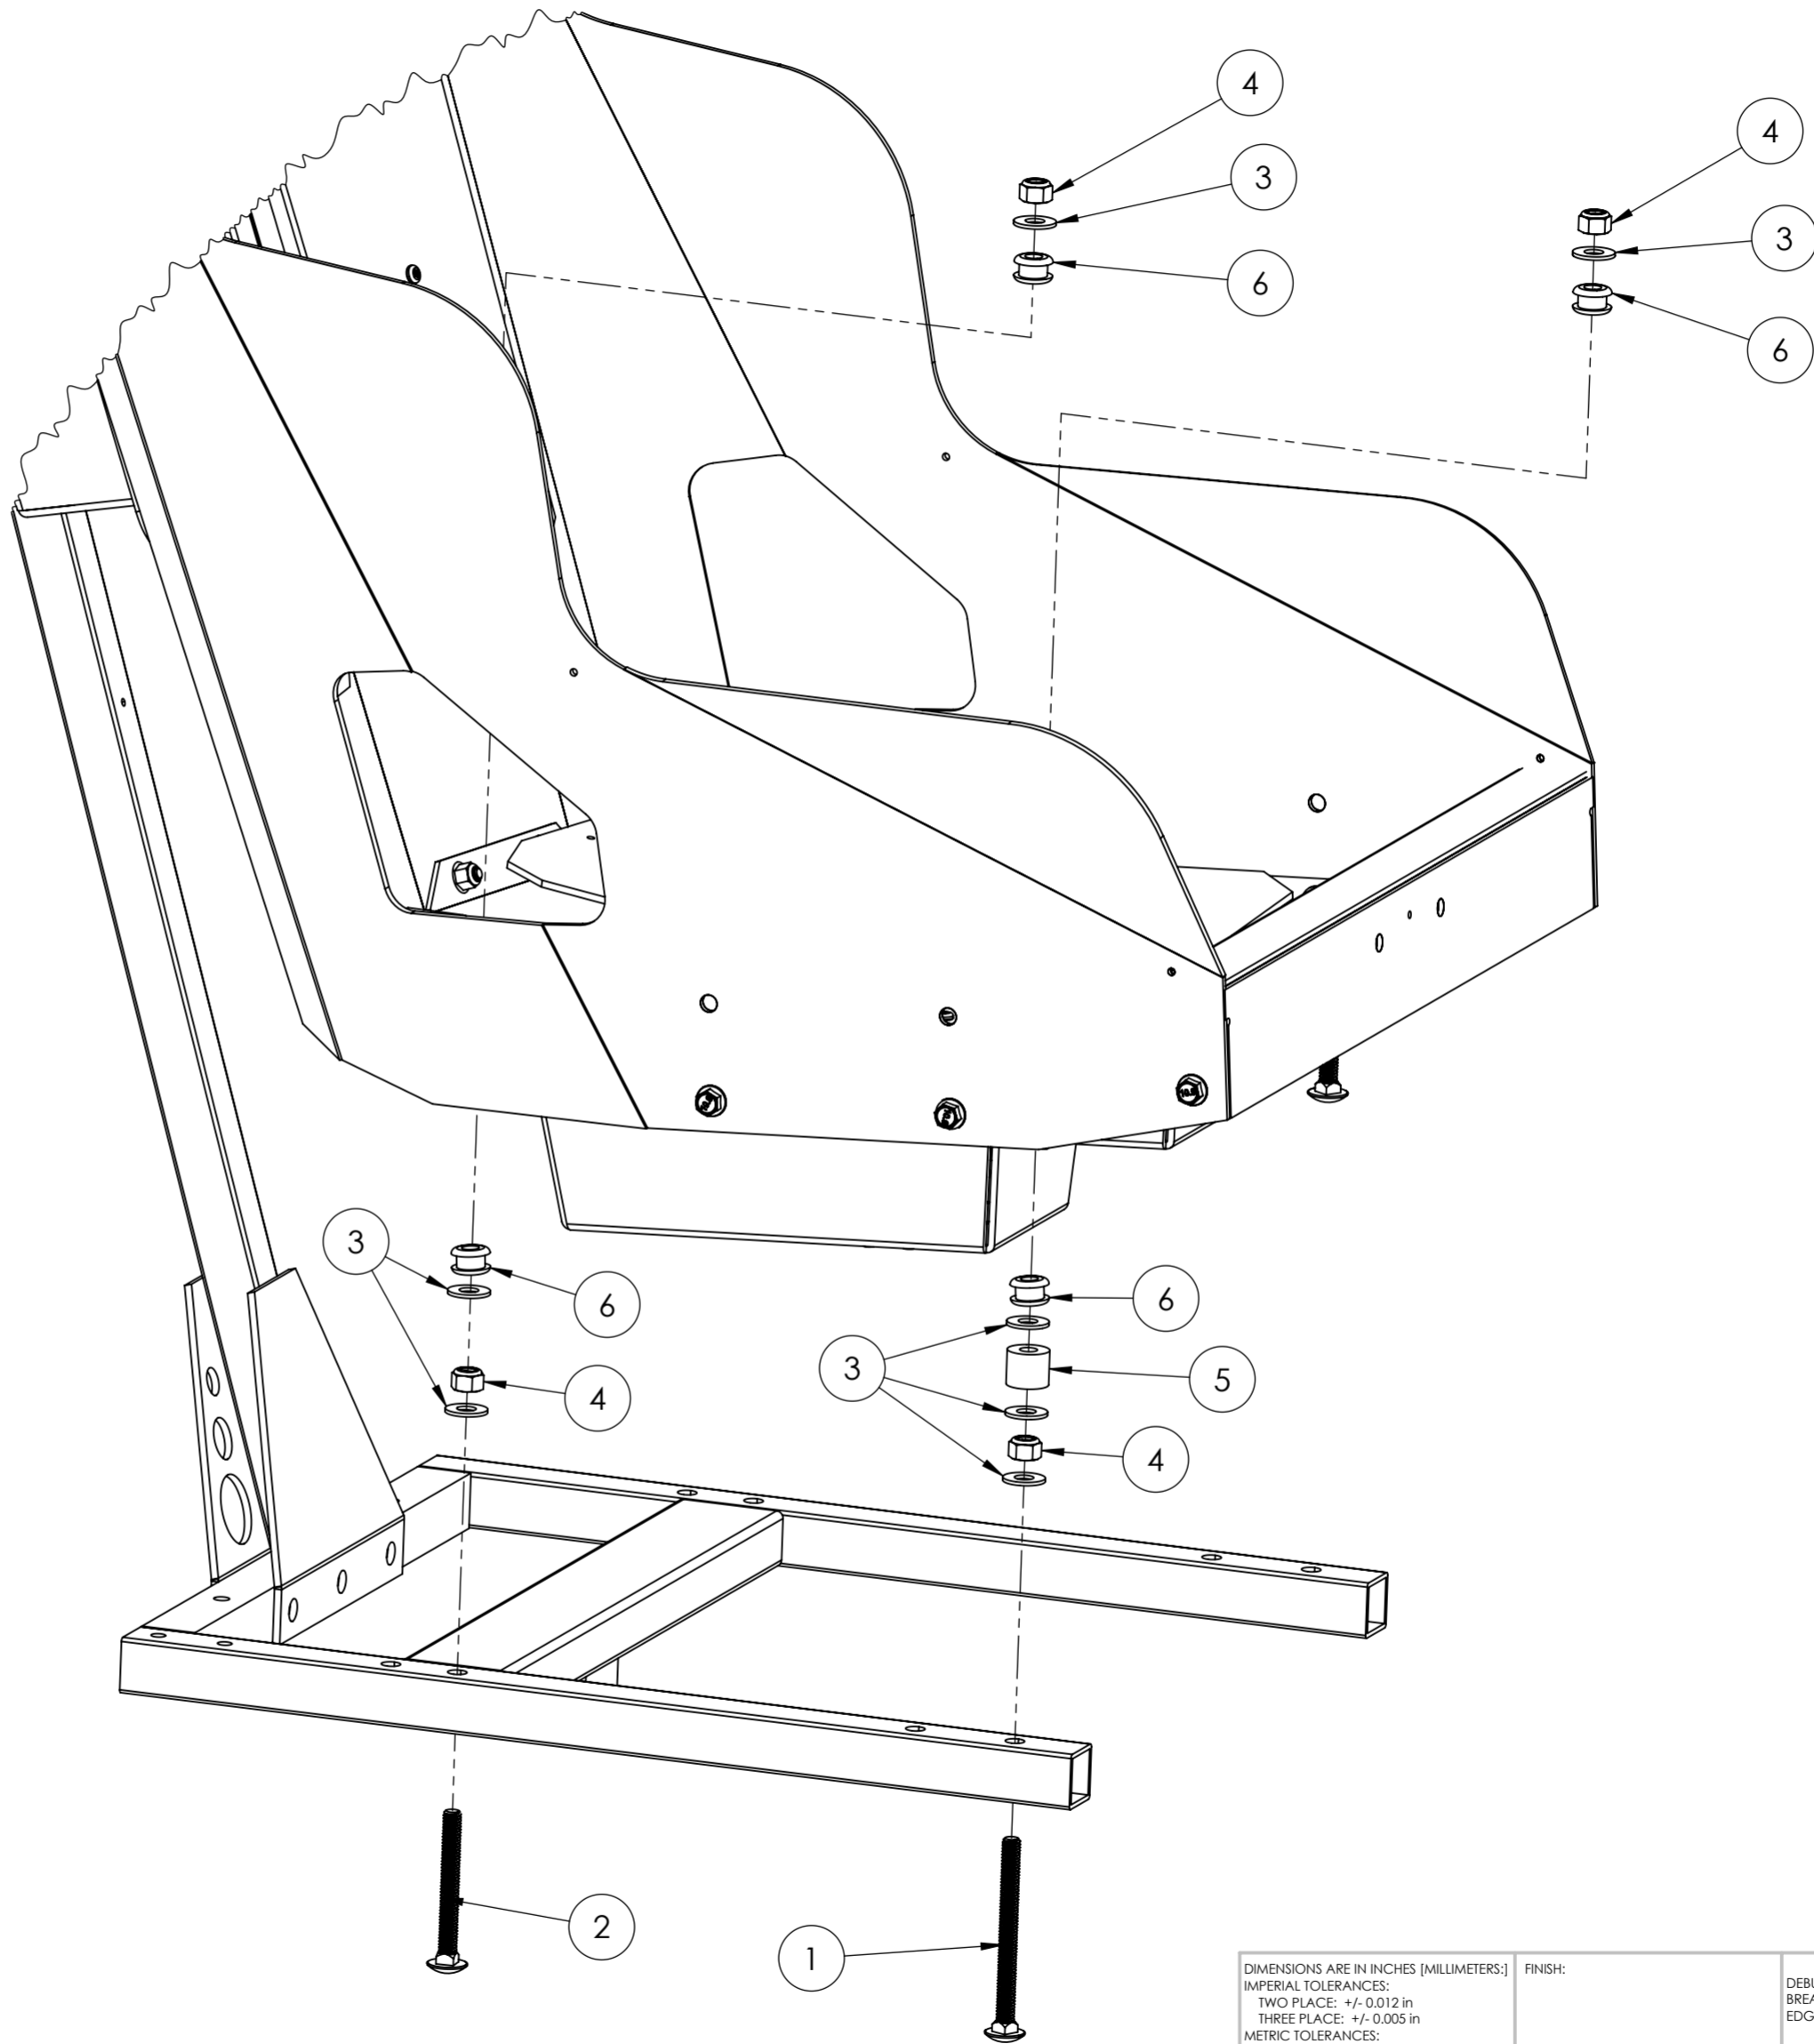


12	11	10	9
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	93548A597	Zinc-Plated Steel Square-Neck Carriage Bolt, Low-Strength, 5/16"-18 Thread Size, 3-1/2" Long	2
2	93548A594	Zinc-Plated Steel Square-Neck Carriage Bolt, Low-Strength, 5/16"-18 Thread Size, 2-3/4" Long	2
3	96765A145	Black-Oxide 18-8 Stainless Steel Washer for 5/16" Screw Size, 0.344" ID, 0.75" OD	14
4	94407A105	18-8 Stainless Steel Nylon-Insert Locknut, Black-Oxide, 5/16"-18 Thread Size	8
5	94639A850	Off-White Nylon Unthreaded Spacer, 3/4" OD, 5/8" Long, for 5/16" Screw Size	2
6	SX-9600K54.A	SBR Rubber Push-In Grommet for 1/2" ID and 1/4" Material Thickness	8
7	3201T14	Black-Oxide Steel U-Bolt, 1/4"-20 Thread Size, 1-1/2" ID	1
8	96765A140	Black-Oxide 18-8 Stainless Steel Washer for 1/4" Screw Size, 0.281" ID, 0.625" OD	2
9	94407A104	18-8 Stainless Steel Nylon-Insert Locknut, Black-Oxide, 1/4"-20 Thread Size	2

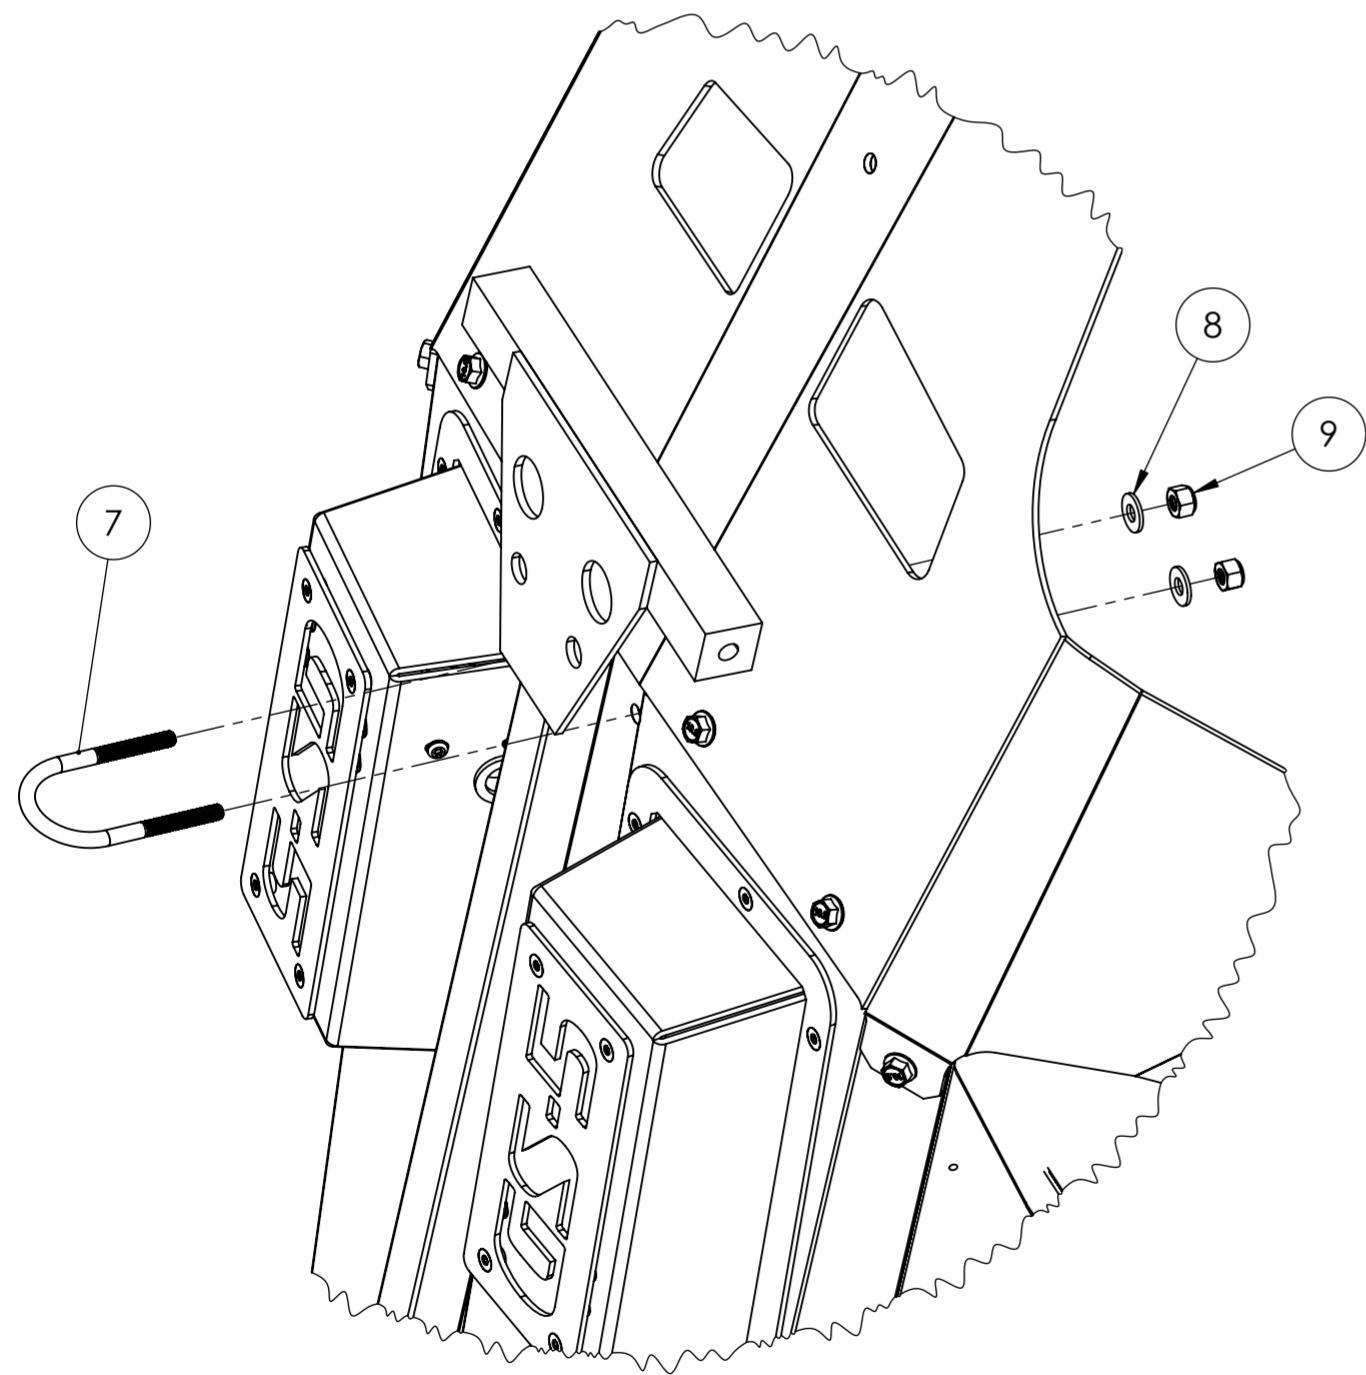

DIMENSIONS ARE IN INCHES [MILLIMETERS]: IMPERIAL TOLERANCES: TWO PLACE: +/- 0.012 in THREE PLACE: +/- 0.005 in METRIC TOLERANCES: ONE PLACE: +/- 0.3 mm] TWO PLACE: +/- 0.13 mm]				FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	A3				
<div>SIMXPERIENCE</div>								TITLE: <div>GS-5 STAGE MOTION INSTALL</div>		DWG NO. <div>SX-GS5-ASM.A</div>		A2			
DRAWN	NAME PAT DOTSON		SIGNATURE		DATE XX/XX/XX										
CHK'D															
APPV'D															
MFG															
Q.A							MATERIAL:								
							WEIGHT:								
								SCALE:1:3			SHEET 5 OF 6				